

TABLE "A" RAFTER SPANS (DOUGLAS FIR #2 OR BETTER)			TABLE "B" HEADER SIZE & SPANS (DOUGLAS FIR #2 OR BETTER)		TABLE "C" FOOTING SIZE	TABLE "D" LEDGER BOLTING
SIZE	SPACING	SPAN	RAFTER SPAN	HEADER SPAN SIZE	BASED ON 1000 P.S.F. SOIL BEARING PRESSURE.	ALL LAG BOLTS SHALL HAVE 1/4" PRE-DRILLED HOLES * (SEE NOTE 2)
2 x 4	12" O.C. 16" O.C. 24" O.C. 32" O.C.	9'-10" 8'-11" 7'-8" *6'-3"	UP TO 12'-0"	8'-0" MAX 4 x 6		
2 x 6	12" O.C.	15'-4"		10'-0" MAX 4 x 8	18" SQ. X 12" DEEP	
	16" O.C.	13'-9"		12'-0" MAX 4 x 10	18" SQ. X 12" DEEP	
	24" O.C.	11'-3"		14'-0" MAX 4 x 12	18" SQ. X 12" DEEP	
2 x 8	32" O.C.	*9'-7"	12'-1" TO 20'-0"	8'-0" MAX 4 x 8	24" SQ. X 12" DEEP	(2) 3/8" DIA X 5" LONG AT 16" O.C.
	12" O.C.	20'-0"	10'-0" MAX 4 x 10	24" SQ. X 12" DEEP		
	16" O.C.	18'-2"	12'-0" MAX 4 x 12	24" SQ. X 12" DEEP		
	24" O.C.	14'-10"	14'-0" MAX 4 x 14	24" SQ. X 12" DEEP		
2 x 10	32" O.C.	*12'-8"				
	12" O.C.	20'-0"				
	16" O.C.	20'-0"				
	24" O.C.	18'-11"				
4 x 4	32" O.C.	*16'-2"				
	24" O.C.	10'-0"				
	32" O.C.	*9'-3"				
4 x 6	48" O.C.	*7'-8"				
	24" O.C.	15'-11"				
	32" O.C.	*13'-9"				
4 x 8	48" O.C.	*11'-3"				
	24" O.C.	20'-0"				
	32" O.C.	*18'-2"				
	48" O.C.	*14'-10"				

NOTES:

- TWO 2X MEMBERS MAY BE SUBSTITUTED FOR ONE 4X HORIZONTAL FRAMING MEMBER.
- LAG BOLTS MUST FULLY ENGAGE A WOOD STUD OR RIM JOIST AND BE PROVIDED WITH APPROPRIATE WASHERS. LAG BOLTS SHALL BE LOCATED A MINIMUM OF 1-1/2" FROM THE TOP OR BOTTOM OF THE LEDGER.
- NOT DESIGNED TO BE ENCLOSED - ADDITIONAL ENGINEERING ANALYSIS WILL BE REQUIRED IF ENCLOSED.
- SEE PAGE 2 OF 2 FOR CONSTRUCTION DETAILS.

DISCLAIMER:


ALTERNATE PATIO DESIGNS MAY BE POSSIBLE WHEN PROVIDED WITH AN ENGINEERED ANALYSIS. USE OF THIS CONVENTIONAL STANDARD DESIGN IS AT THE USER'S RISK AND CARRIES NO IMPLIED OR INFERRED GUARANTEE AGAINST FAILURE OR DEFECTS.

* THIS SPACING AND SPAN IS FOR LATTICE PATIO COVERINGS ONLY.


 <p>CITY OF AGOURA HILLS</p>	<p>CITY OF AGOURA HILLS BUILDING DEPARTMENT</p>	
	<p>PATIO COVER STANDARD</p>	
<p>Phone: 818-597-7334 Fax: 818-597-7352 Revised 4/24/08</p>	<p>30001 Ladyface Court Agoura Hills, CA 91301</p>	<p>No. 104 Pg 1 of 2</p>

KNEE BRACE DETAIL AT END POSTS

(REQUIRED WHEN RAFTER SPAN EXCEEDS 12 FT.)

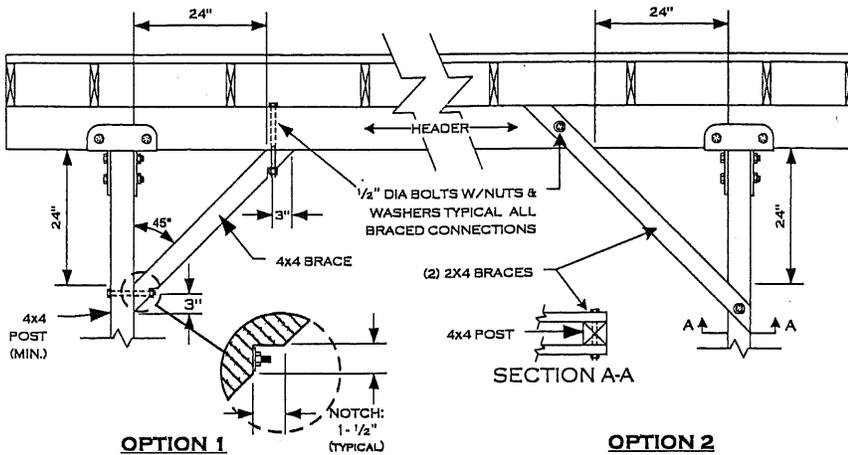


LEDGER ATTACHMENT DETAIL

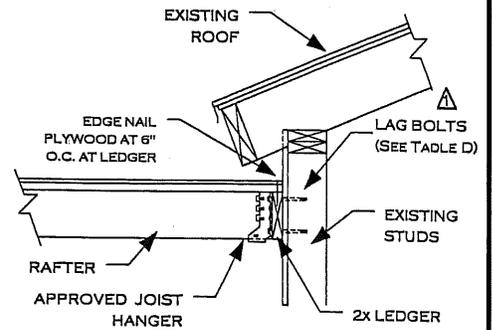

NOTES:

1. USE A CONTINUOUS 2X LEDGER - SAME DEPTH AS RAFTER OR LARGER
2. SEE TABLE "D" FOR BOLTING REQUIREMENTS

INVERTED HEADER DESIGN OPTION (LATTICE ONLY)

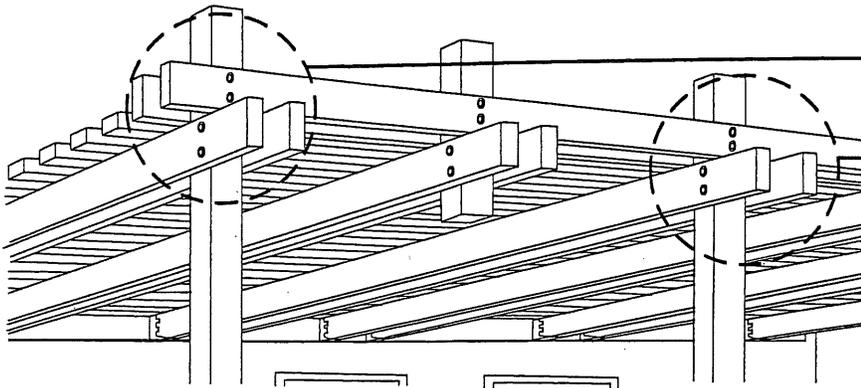

TWO 1/2" DIA. THRU-BOLTS (W/ WASHERS), PER CONNECTION AS SHOWN



FOR HEADERS OR RAFTERS - TWO 2X MEMBERS MAY BE SUBSTITUTED FOR ONE 4X MEMBER. SEE TABLES "A" & "B" FOR SPAN LIMITS

NOTE: KNEE BRACING REQUIRED WHEN RAFTER SPAN EXCEEDS 12 FEET

2X FASCIA (OVERHANG) ATTACHMENT - LATTICE ONLY

OPTION 1

OPTION 2

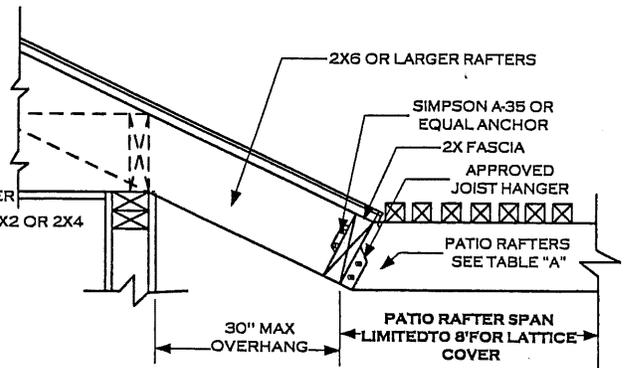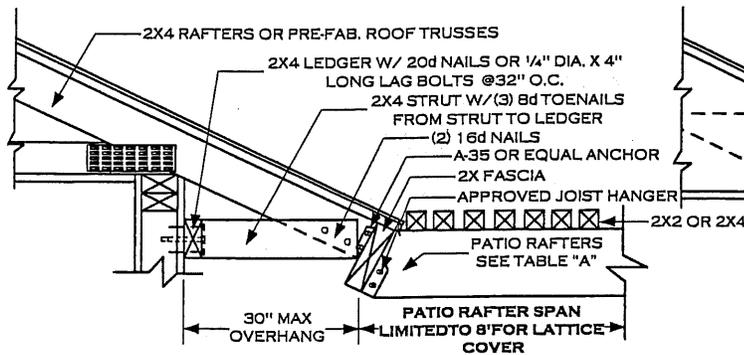

NOTE: VERIFY STRUCTURAL SOUNDNESS OF ROOF RAFTERS FOR DECAY OR TERMITE DAMAGE, AND REPLACE WITH LIKE MATERIALS AS NEEDED, AFTER CONSULTATION WITH THE BUILDING DEPARTMENT.



**CITY OF AGOURA HILLS
BUILDING DEPARTMENT**

PATIO COVER STANDARD

Phone: 818-597-7334

Fax: 818-597-7352

Revised 4/24/08

30001 Ladyface Court
Agoura Hills, CA 91301

No. 104

Pg 2 of 2